


# ARC 357

**ONE MODULE, ENDLESS POSSIBILITIES**

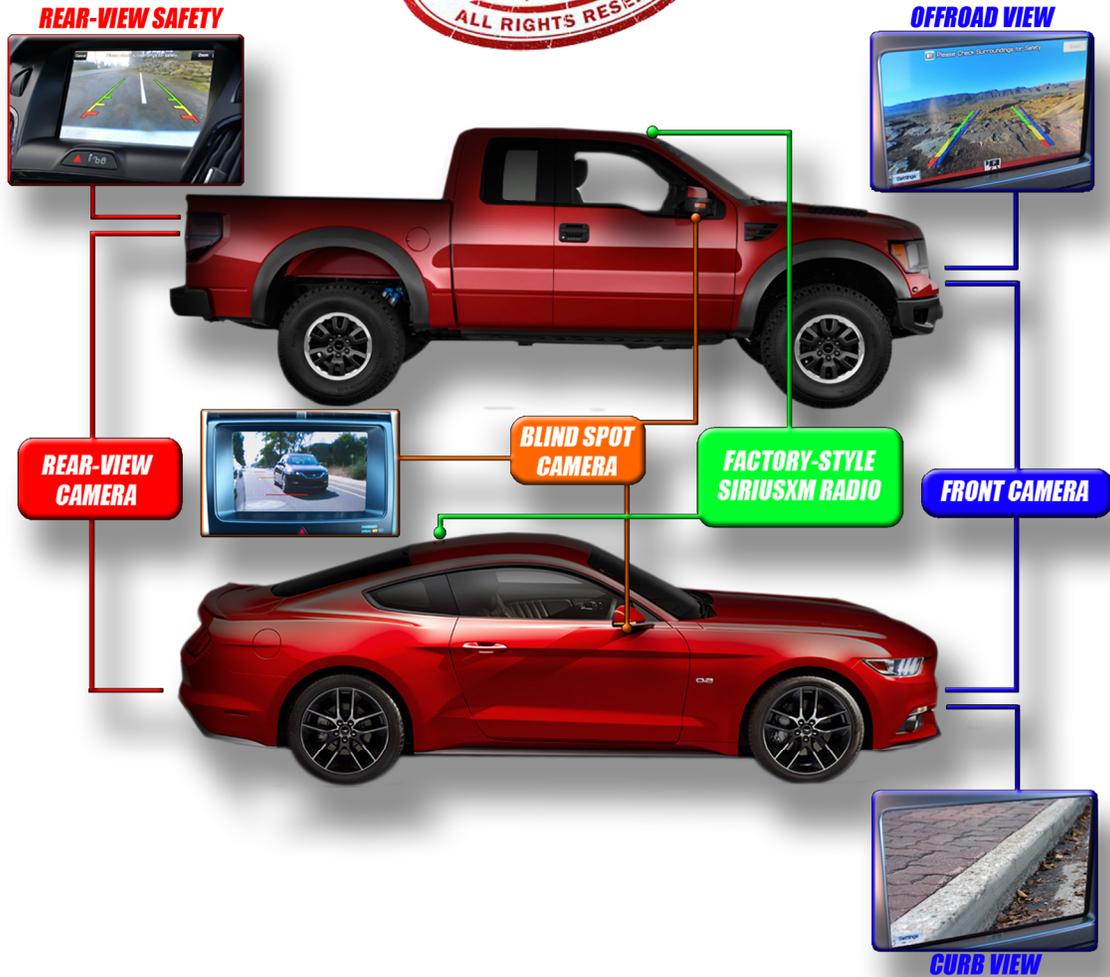

# Owner's Manual

Encompassing all ARC-357 Product for use with Front/Blind/Spot/Auxiliary Cameras

For installation, see *Installation Manual* included with product.

This kit requires professional installation.

Find installation help and product info at [WWW.ARC12VOLT.COM](http://WWW.ARC12VOLT.COM)

INSTALLATION MANUAL - ARC357 - [WWW.ARC12VOLT.COM](http://WWW.ARC12VOLT.COM)



## MYFORD AND MYFORD TOUCH INSTALLATIONS

The auxiliary camera can be activated by pressing and holding the “OK” button for 3 seconds on either the radio controls or the steering wheel controls. A simple press of the “OK” button will exit Front/Cargo/Blind Spot camera modes. Any of the “OK” buttons can be used to enter and exit, you do not need to use the same button as you used to enter the auxiliary camera mode.

This kit also can be configured to use a manual/hardwire activation to enable the auxiliary camera. The module can be wired to a ground switch or to an accessory capable of providing a ground output such as curb sensing accessories. Ask your installer for more information regarding this feature. Pressing the “OK” Button will exit front/side camera mode regardless of trigger status. In order to resume front/side camera mode the trigger must be disconnected for at least 3 seconds.



### Ford 4" Screen **important notes:**

- Depending on vehicle configuration, display may stay in reverse camera mode until vehicle is driven to a pre-determined speed. **This is a factory function.**
- Some displays will show a magnifying glass (zoom) icon on the display. This is meant to be used with an OEM Camera with zoom function. It is not compatible with any aftermarket cameras and cannot be disabled.

# CHRYSLER CMC (RA2, RA3, RA4) INSTALLATIONS

---

## Front Camera Use:

To use front camera, your installer should have installed a manual activation switch. Activating this input will enable the front camera input at speeds up to 7MPH. This trigger could also be used with aftermarket accessories capable of triggering the input such as a curb alert system.

## Blind Spot Camera Use:

The display will automatically switch to Blind Spot camera mode when the vehicle's right turn signal is activated. Display will return to factory when turn signal is deactivated.

## Cargo Camera Use:

This kit will work with a factory installed cargo camera or an add-on camera. If the cargo camera was installed from the factory and replaced as the default by the backup camera, your installer can connect the camera as your auxiliary camera. You can now use a switch that will manually activate the cargo camera.

## FRONT/BLIND SPOT/CARGO CAMERA UNIVERSAL NOTES

---

### Behavior:



*Ask your installer which mode your kit is configured for.*

**Front/Aux Camera Mode:** This kit will only function up to 7MPH in Front Camera Mode. This mode is for off-road use **only**. It is not to be used as a driving aid on public roads. At 7MPH the manual activation is disabled.

**Blind Spot/Cargo Camera Mode:** The kit will work at any speed while in Blind Spot/Cargo camera mode, but will only work for up to 30 seconds at a time.

## Technical Support

Technical support resources, installation guides, and installation videos are available on our website, **www. ARC12VOLT.com**